




Survey Information

INSTRUCTIONS

1. Survey must be completed based upon conditions at time of installation
2. Dock face must be clear of any obstructions prior to installation of the Lock & Load™.
3. Lights and signs must be mounted in full view of forklift and tractor-trailer operations.
4. Examples of why bracketing may be required:
 - A. Sloped approach greater than 1/2" per foot.
 - B. Bumper projection over 4". (Bumpers are manufactured to nominal sizes; actual projection must be verified.)
 - C. Insufficient embedded front pit curb angle
 - D. 24" deep pits.
5. Other than solid concrete dock face (6" thick minimum).
6. Hollow "D" and flex steel bumpers not acceptable.

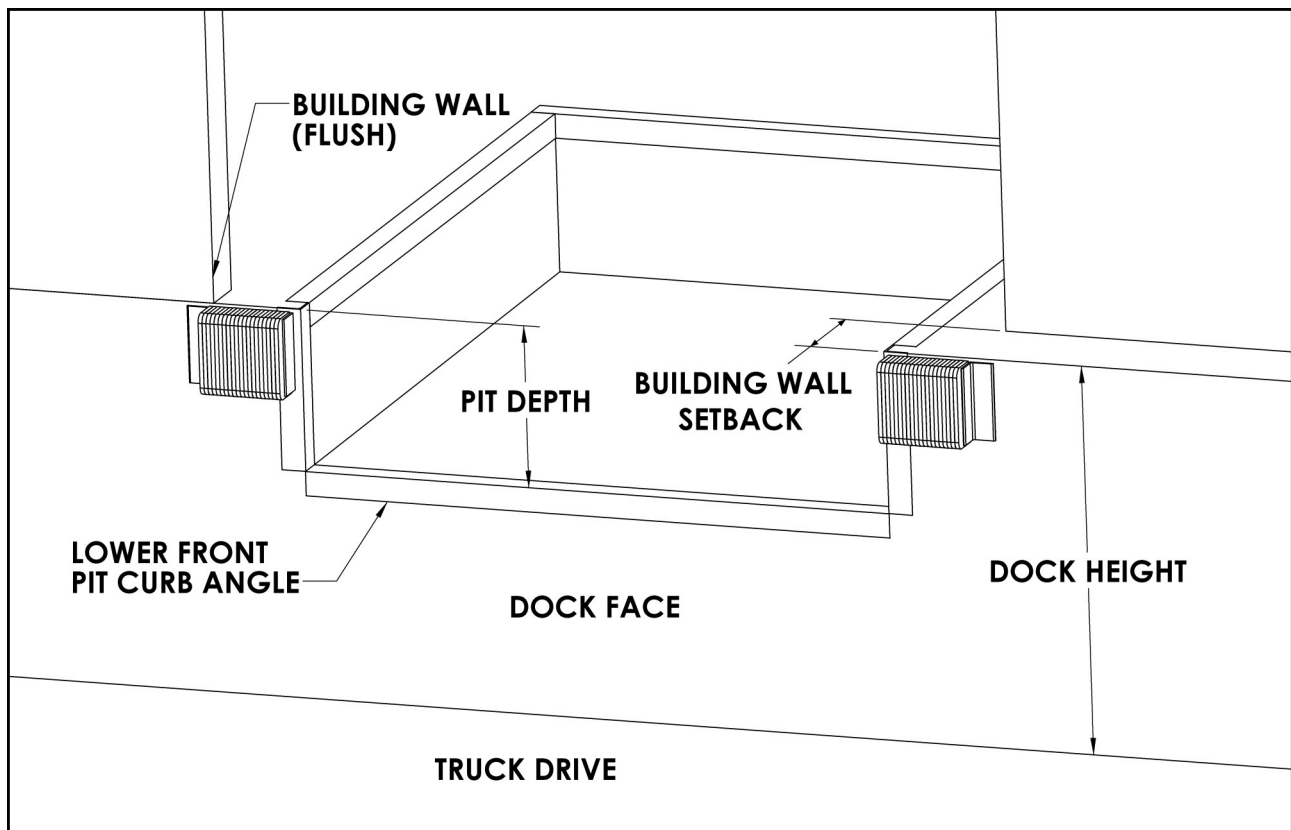

Customer: _____ NOVA #: _____

Surveyed by: _____ Date: _____ Quantity: _____

1. Dock/Door #'s: _____

2. Is the Dock Leveler Truck Activated? If yes, consult factory.

3. Lip Length: _____ Inches **NOTE:** Enter "0" for no leveler.

4. Lip Hinge Type

Closed(piano/spool) Fixed (no hinge) Open (lug) N.A. (no leveler)

5. Barrier Lip

Yes No

6. Pit Depth/Front Frame Depth: _____ Inches

NOTE: Enter front frame height for levelers on self standing frames. Enter "0" if no leveler or EOD type leveler.

7. Dock Height: _____ Inches

8. Dock Face/Lock & Load Mounting Surface

Concrete,solid tilt-up precast, min 6 thick Concrete, min 6" thick, embedded mounting plate
 Brick/cinder block, hollow tilt-up/precast Stub wall (partial wall w/open pit)
 Legs/Self Standing Frames -(Consult Factory) Other

9. Is the pit floor material concrete?

Yes No

10. If pit does not exist, is the dock floor concrete?

Yes No

11. Is there an existing pit floor plate bracket?

Yes No

12. Bumper Projection: _____ Inches

13. Lower Front Pit Curb Angle

3 x 3 4 x 4 None Pan Material Other

14. Wall Position to Dock Face

Flush Protruding Set Back

15. Amount of Wall Set Back/Protrusion: _____ Inches

16. Cantilever Height Off Approach: _____ Inches

17. Projection of Cantilever: _____ Inches

18. Sub-frame Position to Dock Face:

Flush Protruding Set Back Not Applicable

19. Sub-frame Set back or Protrusion: _____ Inches

20. Will Yard Jockeys be Used:


Yes No

21. Drive/Approach Material at Dock Face:

Concrete Asphalt Gravel/Dirt Other: _____

22. Is the Approach Level or Sloped?

Level (**Note:** If Level, disregard questions A, B & C below) Sloped (**Note:** If Sloped, complete questions A, B & C below)

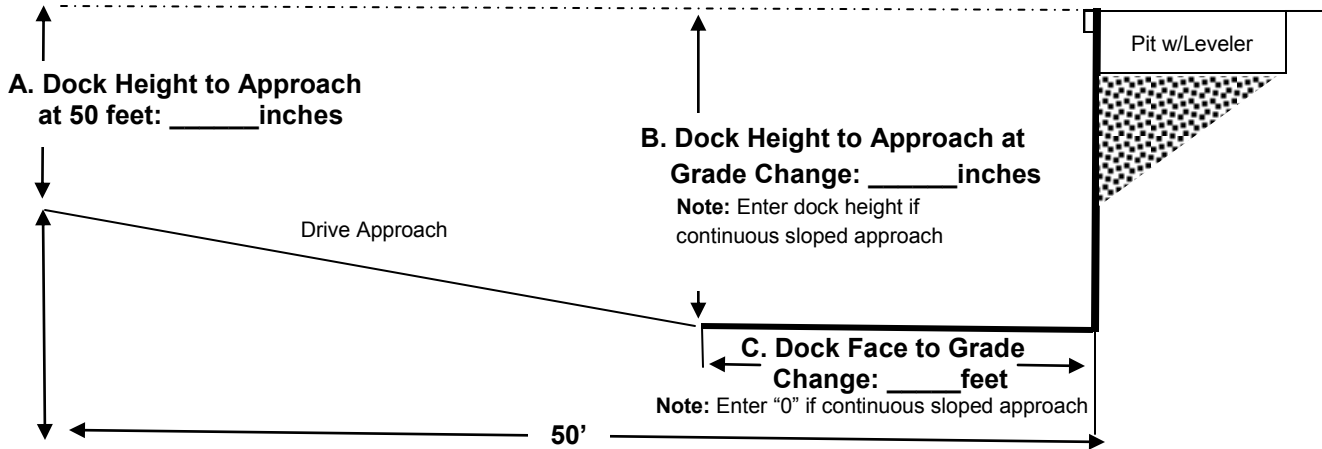

23. Will this application incorporate Trailer Lifts, Wheel Risers, Existing Brackets (Aftermarket Upgrade) or Obstructions on the Dock Face?

No Existing Brackets (Upgrade) Trailer Lift Dock Face Obstructions
 Wheel Risers

24. Is there a trench located 12" or less from the face of the bumpers?

Yes No

25. Will manufacturer supply cantilever bracket?

Yes No


26. Will manufacturer supply floor bracing?

Yes No


27. Will manufacturer supply additional anchors?

Yes No

Cantilever Layout

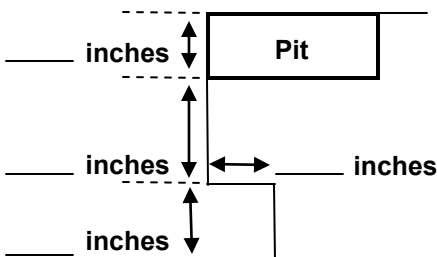

Shelf Layout

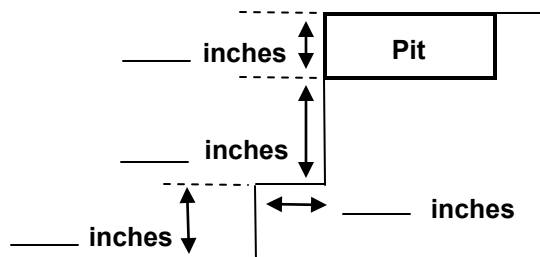

This section must be completed for Edge of Dock Levelers.

